

Value Engineered - Quality Guaranteed!


M Series— “Generation 2”– Mortise Lock Diagram—Handing Guide— Crossover notes:

Mortise Lock will replace Best and Arrow A & B Mortise Lock without additional prep.
 Mortise Lock will replace Falcon and Corbin, Arrow AM/BM with drilling of 2 additional through holes
 For Schlage, Yale, and Sargent, the distance cylinder center to lever center is different, minor
 additional prep is required. *Please see template instructions.*

Mortise lock comes with 1 Strike either left handed or right handed– “Please specify when ordering”
 Both strikes can be shipped upon request– additional charge of \$ 3.00 will be added to cost.

Features & Specifications

For Doors.....	1 ¼" thick.	
Backset.....	2 ¾".	
Lockcase.....	Heavy gauge steel 8" x 1 ¼" x 3/32". Accommodates flat doors & Doors beveled 1/8" in 2".	
Armored Front.....	Wrought brass or stainless steel attached by machine screws to lockcase front.	
Deadbolt.....	1" throw, brass, chrome plated with hardened steel rollers.	
Latchbolt.....	Brass, chrome plated with Delrin Anti-friction insert.	
Guardbolt.....	Extruded brass, chrome plated.	
Stopworks.....	Push Button, brass, chrome plated.	
Strike.....	Brass or stainless steel, 4 7/8" x 1 ¼". Handed curved-up ANSI strike.	
Hand.....	Handed. Reversible in field.	
Trim.....	As specified.	
Cylinder.....	As specified.	
Keyway.....	As specified.	
Finishes.....	As specified.	
UL Listings.....	U.L. Listed "A" Label (3 hour), for use on fire doors: single or pairs.	
ANSI.....	Lock body conforms to Federal specification Type 86; and to all dimensional and operational performances of ANSI A156.13 2002, Series 1000.	

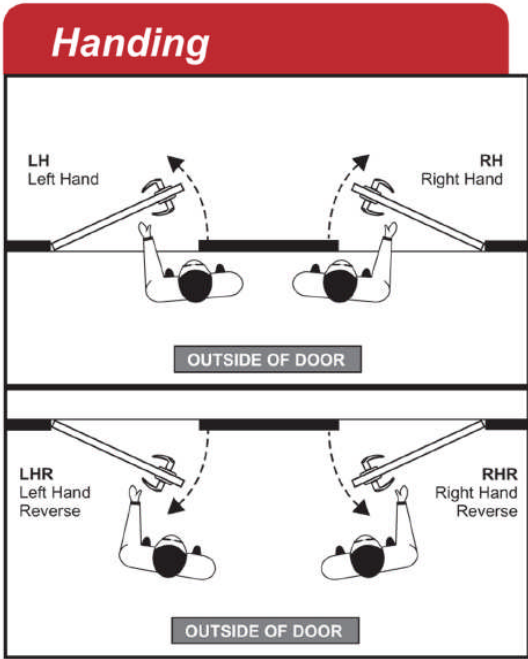

Please! Double check handing required before ordering!

Save time, effort and cost of additional strike!